No Sound Series
1370 NS

Certified for:

- Sound insulation **57 dB**
- Fire resistance: **60 min.**
- Insulation from smoke **1,08 m3 / h / m – 25 Pa**
- Usage cycles **200.000 cycles**

Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

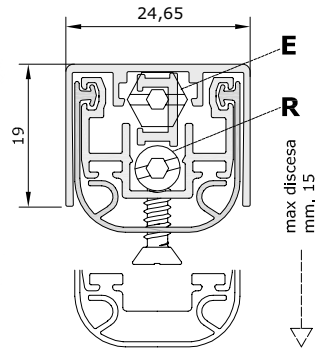

STANDARD ACCESSORIES

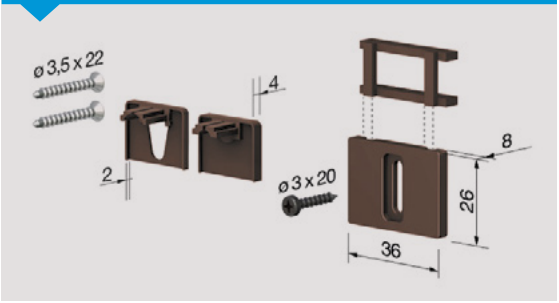

Standard measurements (mm)	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	100	100	100	100	100	100	100	100	100

FASTENING SYSTEMS

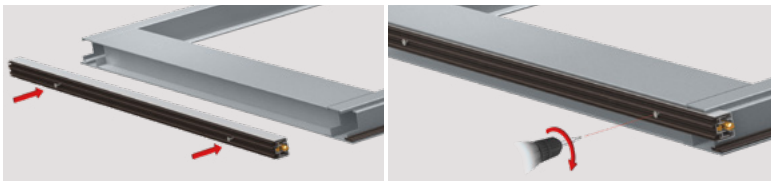

With pre-mounted screws

MAIN APPLICATIONS

Steel door | Wood door

Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

STANDARD: Cardboard box with 25 pcs + 25 standard accessory packs.

Extruded profiles in aluminium alloy 6060 - high performance wrap-around silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3.5 x 22 mm screws.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA102	CA103	CA104	AE
CA201	CA202	CA203	CA204
CA205	CA207		

100 pcs pack

brown, white

2 Insulating nylon plate with silicon gasket

PI001	PI002	PI002-R
PI003	PI004	PI005

20 pcs pack

brown, white

Application examples

Smooth frame | Frame with ribbing

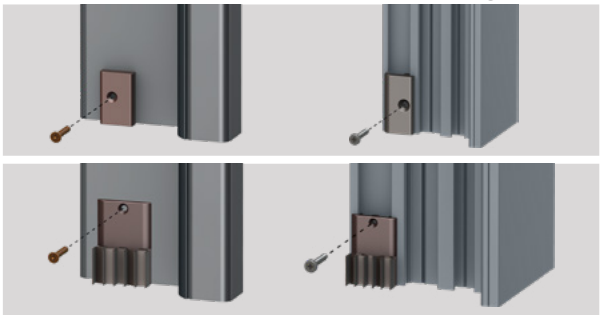

BUTTON (E): round nylon, square nylon, bevelled nylon, rolling nylon (pivot).
GASKET: dual high performance silicone lamellar (art. AE p. 44)

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

Comaglio
www.comaglio.it