

Basic Series

420

MINI





Certified for:

- Sound insulation 42 dB
- Fire resistance: 30 min.
- Insulation from smoke 2,03 m³ / h / m - 25 Pa
- Usage cycles 200.000 cycles


Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

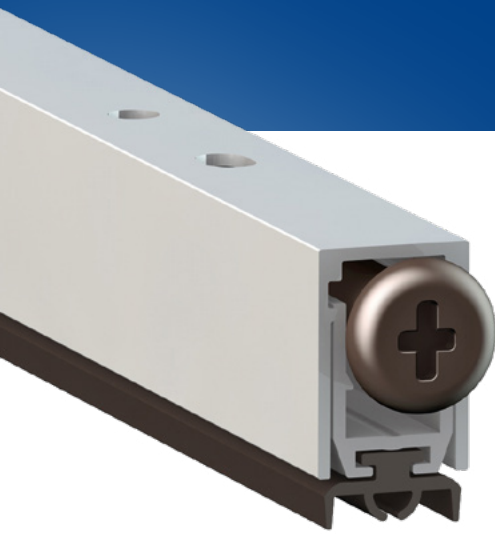


STANDARD ACCESSORIES

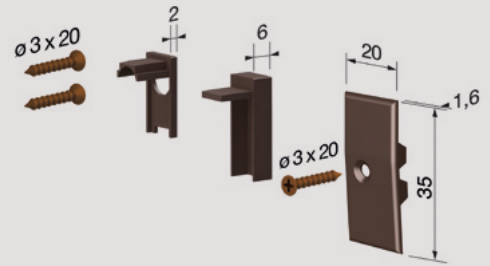

Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	130	130	200	200	200	200	200	200	200	200	200

FASTENING SYSTEMS

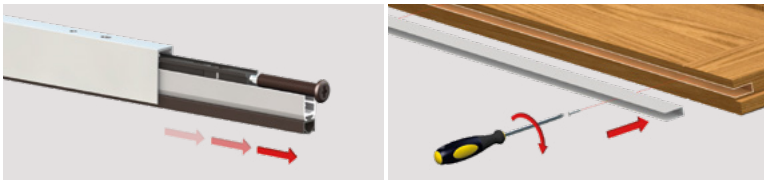


Remove and screw

Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

STANDARD: Cardboard box with 50 pcs + 50 standard accessory packs.

MAIN APPLICATIONS

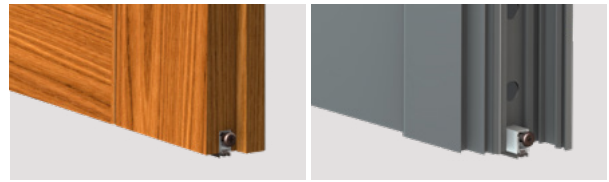

Wood door

Aluminium door



Extruded profiles in aluminium alloy 6060 - lamellar gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - Ø 5 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA102	CA103	CA106	100 pcs pack brown, white
CA201	CA202	CA203 CA204	
CA205	CA207		

2 Insulating nylon plate with silicon gasket

PI001	PI002	PI002-R	20 pcs pack brown, white
PI003	PI004	PI005	


3 Using brackets

SCO02A-MINI	SCO02B-420MINI	20 pcs pack steel, brown

Application examples

Smooth frame

Frame with ribbing

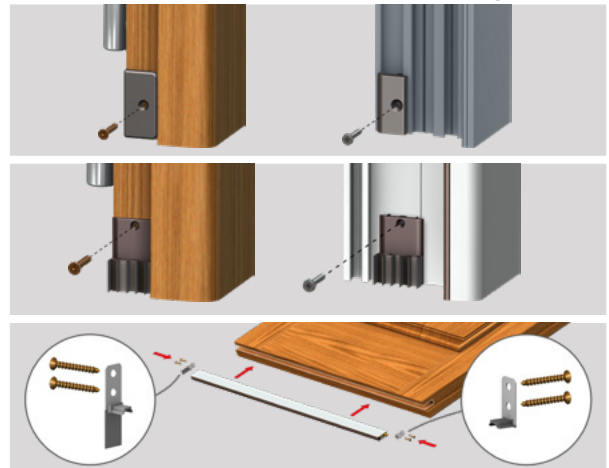

BUTTON (F): hexagonal brass, square nylon, bevelled nylon, rolling nylon (pivot). **GASKET:** tubular EPDM, brush.

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.