Basic Series
MARK 420

Certified for:

- Sound insulation **34 dB**
- Fire resistance: **30 min.** (EPDM standard gasket) **60 min.** (optional silicon gasket)
- Insulation from smoke **2,30 m3 / h / m – 25 Pa**
- Usage cycles **200.000 cycles**

Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

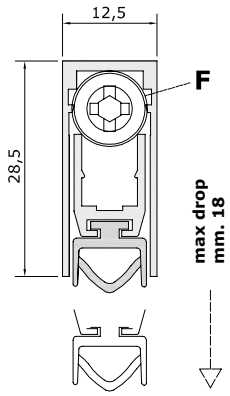

STANDARD ACCESSORIES

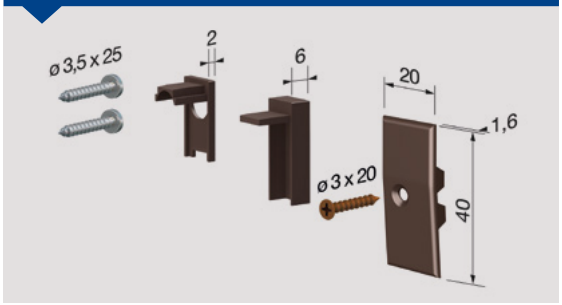

Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	130	130	200	200	200	200	200	200	200	200	200

FASTENING SYSTEMS

Remove and screw

MAIN APPLICATIONS

Wood door | Armoured door

Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

STANDARD: Cardboard box with 40 pcs + 40 standard accessory packs.

Extruded profiles in aluminium alloy 6060 - tubular gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - Ø 5 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA101 | CA102 | CA104

100 pcs pack

brown, white

2 Insulating nylon plate with silicon gasket

PI001 | PI002 | PI002-R

20 pcs pack

brown, white

3 Using brackets

SC002A | SC002B-422

20 pcs pack

steel, brown

Application examples

Smooth frame

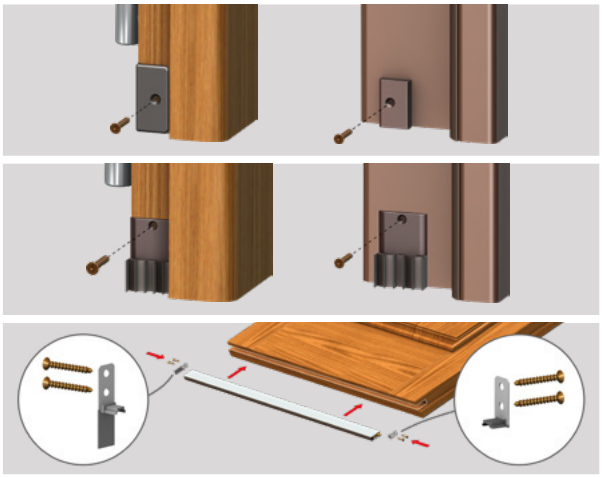

BUTTON (F): hexagonal brass, square nylon, bevelled nylon, rolling nylon (pivot). **GASKET:** silicon tubular, brush.

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.

Comaglio
www.comaglio.it