

Basic Series


513




Certified for:

Usage cycles
200.000 cycles

Protects from:




Not an obstacle for disabled persons

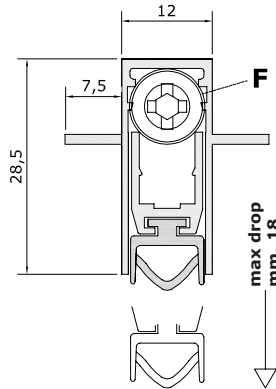

Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	130	130	200	200	200	200	200	200	200	200	200

FASTENING SYSTEMS

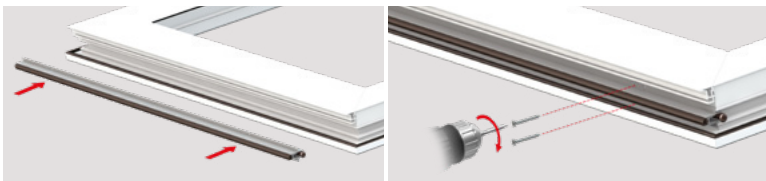

With intermediate side flaps

Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

STANDARD: Cardboard box with 32 pcs + 32 standard accessory packs.

MAIN APPLICATIONS



PVC doors

Extruded profiles in aluminium alloy 6060 - tubular gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - Ø 5 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate


CA102	CA103	CA104	100 pcs pack brown, white
CA201	CA202	CA203 CA204	
CA205	CA207		

2 Insulating nylon plate with silicon gasket

PI001	PI003	PI004	PI005	20 pcs pack brown, white

Application examples

Frame with ribbing

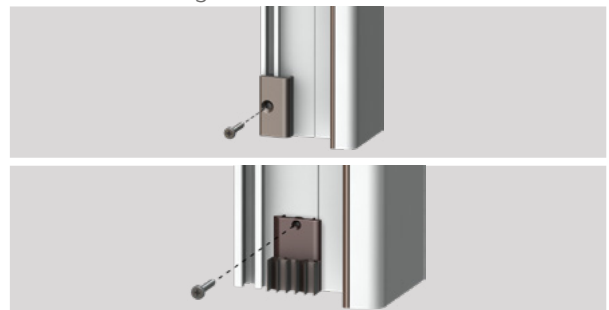

BUTTON (F): hexagonal brass, square nylon, bevelled nylon, rolling nylon (pivot).
GASKET: silicon tubular, brush.

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.