


# No Sound Series

# 1770 XNS MINI

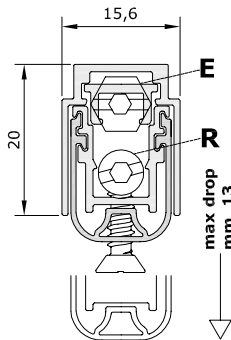

Certified for:

Usage cycles  
200.000 cycles

Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

## STANDARD ACCESSORIES



Standard measurements (mm)

530    630    730    830    930    1030    1130    1230    1330

Max shortening (mm)

100    100    100    100    100    100    100    100    100


## FASTENING SYSTEMS

### STANDARD



With pre-mounted screws

## MAIN APPLICATIONS

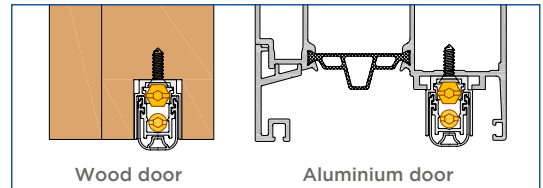

Wood door

Aluminium door

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - high performance wrap-around silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3.5 x 25 mm screws.

### • VARIATIONS ON REQUEST

**Button:** round nylon, square nylon, bevelled nylon.  
**Screws:** particleboard 3.5 x 25 mm.

### STANDARD PACKAGING

Cardboard box with 30 pcs + 30 standard accessory packs

### OPTIONAL PACKAGING

Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

## OPTIONAL ACCESSORIES

### Nylon plate

CA101    CA102    CA104    CA201



CODE	PROFILE
CA201	Deceuninck M.
CA202	Deceuninck Z.
CA203	VE-KA
CA204	Kommerling.
CA205	Schüco CT70
CA207	Winsol

**Colour:**  
brown, white

**Packaging:**  
100 pcs pack

CA101  
on smooth frame



### Insulating nylon plate with silicon gasket

PI001    PI002    PI002-R    PI003



CODE
PI003
Kommerling, Rehau, Winsol
PI004
Zendow, Gealan, Schüco
PI005
Thyssen

**Colour:**  
brown, white

**Packaging:**  
20 pcs pack

PI003  
on frame with ribbing

