

Special Series 970



Certified for:

- Sound insulation **37 dB**
- Usage cycles **200.000 cycles**


Protects from:

- Air
- Water
- Light
- Insects

 Not an obstacle for disabled persons

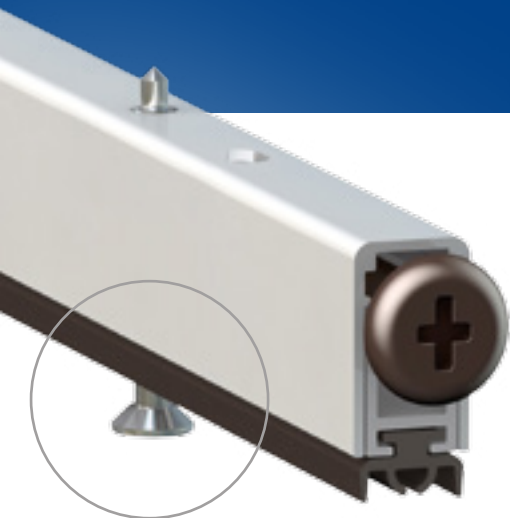


STANDARD ACCESSORIES

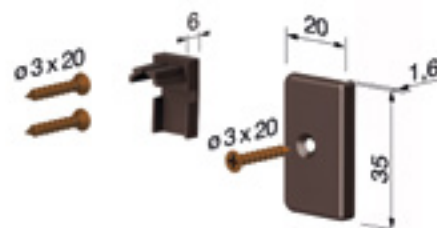


Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	70	130	200	200	200	200	200	200	200	200	200

FASTENING SYSTEMS

STANDARD

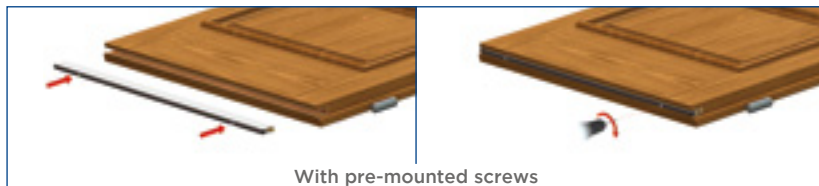

MAIN APPLICATIONS

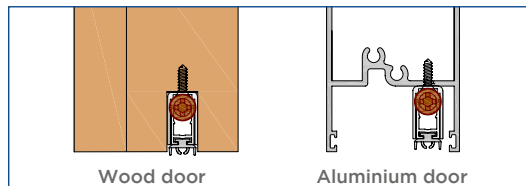

• **FEATURES** Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - double hardness extruded EPDM gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3 x 25 mm screws.

• VARIATIONS ON REQUEST

Button: hexagonal brass.

Screws: particleboard 3.5 x 25 mm.

STANDARD PACKAGING

Cardboard box with 50 pcs + 50 standard accessory packs

OPTIONAL PACKAGING

Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES


Nylon plate

CA104	CA202	CODE	PROFILE
		CA201	Deceuninck M.
		CA202	Deceuninck Z.
		CA203	VE-KA
		CA204	Kommerling.
		CA205	Schüco CT70
		CA207	Winsol

Colour: brown, white

Packaging: 100 pcs pack

CA202
on frame with ribbing

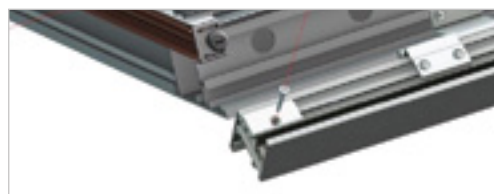

Insulating nylon plate with silicon gasket

PI001	PI002	PI002-R	PI003	CODE
				PI003 Kommerling, Rehau, Winsol
				PI004 Zendow, Gealan, Schüco
				PI005 Thyssen

Colour: brown, white

Packaging: 20 pcs pack

PI003
on frame with ribbing

